


ML1050ST+

Ultra-compact short throw LED projector







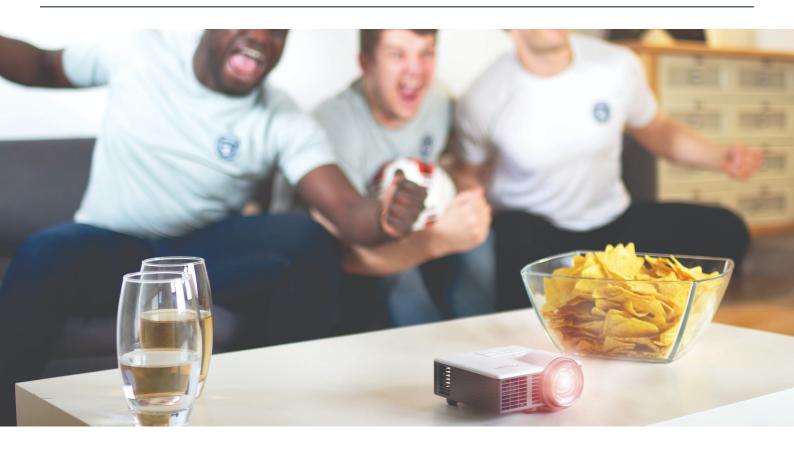

- HD Ready and LED technology Great for movies, gaming and PC-free presentations
- Short throw lens with auto focus
- Feature packed Built in media player, optional wireless, HDMI, MHL, micoSD and built in speaker,
- Ultra compact and lightweight only 420g

Building on the successful ML1050ST the all new ML1050ST+ has all the benefits with the addition of auto focus for a seamless setup.

Perfect for meetings, presentations or movies on-the-go. This tiny projector weighs just 420g and comes with a convenient carry bag.



Specifications

EAN: 5055387662278, Colour: White

Display/image Display technology DIPTM Resolution WXGA (1280x800) 1000/500 Brightness (HK/ANSI) Contrast ratio 20,000:1 Native aspect ratio 16:10 Aspect ratio - compatible 4:3.16:9 Keystone correction - vertical +/-40° Has vertical auto keystone Yes correction

Horizontal scan rate 15.375 ~ 91.146Khz 24 ~ 85(120 for 3D)Hz Vertical scan rate

90% Uniformity

1.27m ~ 2.54m (50" ~ 100") diagonal Screen size

Light source type LED LED life 20,000 hours **Optical** Throw ratio 0.8:1

Projection distance (m) 0.86m - 1.72m Zoom type Fixed 8.02mm/0.32" Focal length (mm) Native offset 100%

Connectivity Connections

Lamp info

Inputs 1 x HDMI 1.4a 3D support + MHL, 1 x microSD card, 1 x USB-A reader, 1 x Universal I/O - VGA

Outputs 1 x Audio 3.5mm

General Noise level (min) 22dB 29dB Noise level (max)

PC compatibility FHD, UXGA, SXGA, WXGA, HD, XGA, SVGA, VGA, Mac 2D compatibility 480i/p, 576i/p, 720p(50/60Hz), 1080i(50/60Hz)

3D compatibility SVGA 120Hz, XGA 120Hz

Security Security bar, Kensington Lock, Password protected interface

OSD / display languages 12 languages: Dutch, English, French, German, Greek, Italian, Polish, Portuguese, Russian, Spanish, Swedish, Turkish

5°C~35°C/41°F~95°F, max altitude 2500M/8202.5ft, max Operating conditions humidity 85%

Remote control Card style Speaker count 1\/\ Watts per speaker In the box

Carry bag Universal I/O cable AC power cord Remote control Battery Basic user manual

Operating system Windows 7 / 8 / 8.1 / 10, MacOSX 10.9 +, Android 4.0+, iOS

compatibility Input lag 16.00ms

WUSB Optional wireless models

Power Power supply

100 ~ 240V, 50 ~ 60Hz

Power consumption (standby) 0.5W 77W Power consumption (max) Weight and dimensions

Dimensions (W x D x H) mm 112 x 123 x 57 Gross weight 0.42 kg Net weight 1.2 kg





